

FEATURES



- Universal 85 - 264VAC or 120 - 373VDC Input voltage
- Accepts AC or DC input (dual-use of same terminal)
- Operating ambient temperature range: -30°C to +70°C
- Low standby power consumption, high efficiency
- High I/O isolation test voltage up to 4000VAC
- Low ripple & noise
- Output short circuit, over-current, over-voltage protection
- Safety according to IEC/EN/UL62368, EN60335, GB4943
- Withstand 300VAC surge input for 5s
- Over-voltage class III (designed to meet EN61558)
- Operating altitude up to 5000m

LM50-20Bxx series is one of Mornsun's enclosed AC-DC switching power supply. It features universal AC Input and at the same time accepts DC input voltage, cost-effective, low no load power consumption, high efficiency, high reliability and double or reinforced insulation. These converters offer excellent EMC performance and meet IEC/EN61000-4, CISPR32/EN55032, IEC/UL/EN62368, EN60335, GB4943 standards and they are widely used in areas of industrial, LED, street light control, electricity, security, telecommunications, smart home etc.

Selection Guide

Certification	Part No.*	Output Power(W)	Nominal Output Voltage and Current (Vo/Io)	Output Voltage Adjustable Range(V)	Efficiency at 230VAC (%) Typ.	Max. Capacitive Load (µF)
CE, CCC	LM50-20B05	50	5V/10A	4.5-5.5	83	8500
	LM50-20B12	50.4	12V/4.2A	10.2-13.8	86	2000
	LM50-20B15	51	15V/3.4A	13.5-18	88	1500
	LM50-20B24	52.8	24V/2.2A	21.6-28.8	88	1000

Note: *Use suffix "Q" for conformal coating.

Input Specifications





Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range	AC input	85	--	264	VAC
	DC input	120	--	373	VDC
Input Voltage Frequency		47	--	63	Hz
Input Current	115VAC	--	--	1.2	A
	230VAC	--	--	0.6	
Inrush Current	115VAC	--	30	--	
	230VAC	--	45	--	
leakage current	240VAC	<0.75mA			
Hot Plug		Unavailable			

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy	Full load range	5V	±2	--	%
		12V/15V/24V	±1	--	
Line Regulation	Rated load	--	±0.5	--	
Load Regulation	0% - 100% load	5V	±1	--	
		12V/15V/24V	±0.5	--	
Ripple & Noise*	20MHz bandwidth (peak-to-peak value)	5V	80	--	mV
		12V/15V	120	--	
		24V	180	--	
Temperature Coefficient		--	±0.03	--	%/°C
Minimum Load		0	--	--	%

Stand-by Power Consumption		--	--	0.3	W
Hold-up Time	115VAC	12	--	--	ms
	230VAC	30	--	--	
Short Circuit Protection	Recovery time <5s after the short circuit disappear.	Hiccup, continuous, self-recovery			
Over-current Protection		110%-150% Io, self-recovery			
Over-voltage Protection	5V	≤6.3VDC (Clamping protection)			
	12V	≤16.2VDC (Clamping protection)			
	15V	≤21.75VDC (Clamping protection)			
	24V	≤33.6VDC (Clamping protection)			
Note: The "Tip and barrel method" is used for ripple and Noise test, please refer to AC-DC Converter Application Notes for specific information.					

General Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit		
Isolation Test	Input - 	Electric strength test for 1min., leakage current <10mA	2000	--	--	VAC		
	Input-output		4000	--	--			
	Output - 		1250	--	--			
Insulation Resistance	Input - 	At 500VDC	50	--	--	MΩ		
	Input - output		50	--	--			
	Output - 		50	--	--			
Operating Temperature			-30	--	+70	°C		
Storage Temperature			-40	--	+85			
Storage Humidity	Non-condensing		--	--	95	%RH		
Switching Frequency			--	65	--	kHz		
Power Derating	Operating temperature derating	-30°C to -25°C	<100VAC Input	5	--	--	% / °C	
		5V	+40°C to +70°C	85VAC-165VAC	1.33	--		--
			+50°C to +70°C	165VAC-264VAC	2	--		--
		12V/15V/24V	+50°C to +70°C	2	--	--		
	Input voltage derating	<100VAC Input	1.33	--	--	%/VAC		
Safety Standard			Meet IEC/EN/UL62368/EN60335/GB4943					
Safety Class			CLASS I					
MTBF	MIL-HDBK-217F@25°C		>300,000 h					



Mechanical Specifications

Case Material	Metal (AL1100, SGCC)
Dimensions	99.00 x 82.00 x 30.00 mm
Weight	200g (Typ.)
Cooling Method	Free air convection



Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032	CLASS B	
	RE	CISPR32/EN55032	CLASS B	
	Harmonic current	IEC/EN61000-3-2	CLASS A	
Immunity	ESD	IEC/EN 61000-4-2	Contact ±6KV /Air ±8KV	Perf. Criteria A
	RS	IEC/EN 61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN 61000-4-4	±2KV	perf. Criteria A
	Surge	IEC/EN 61000-4-5	line to line ±2KV/line to ground ±4KV	perf. Criteria A
	CS	IEC/EN61000-4-6	10 Vr.m.s	perf. Criteria A
	Voltage dips, short interruptions and voltage variations immunity	IEC/EN61000-4-11	0%, 70%	perf. Criteria B


Product Characteristic Curve

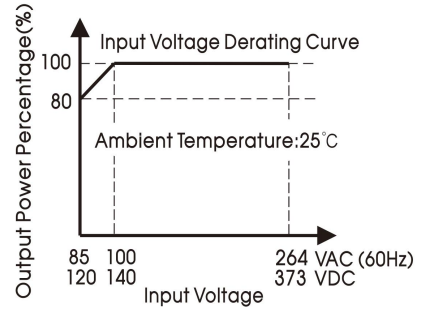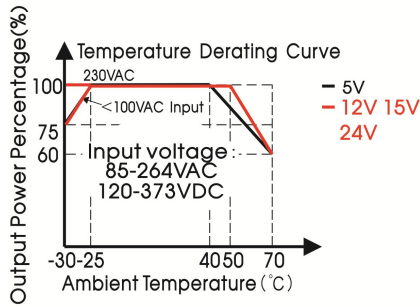

Note: ① With an input voltage between 85 - 100VAC and a DC input between 120-140VDC the output power must be derated as per the temperature derating curves;
② This product is suitable for applications using natural air cooling; for applications in closed environment please consult Mornsun FAE.

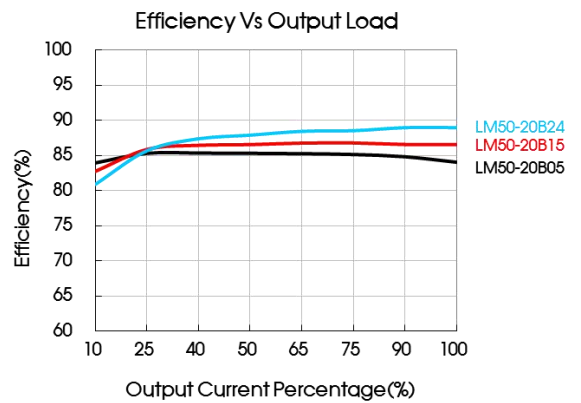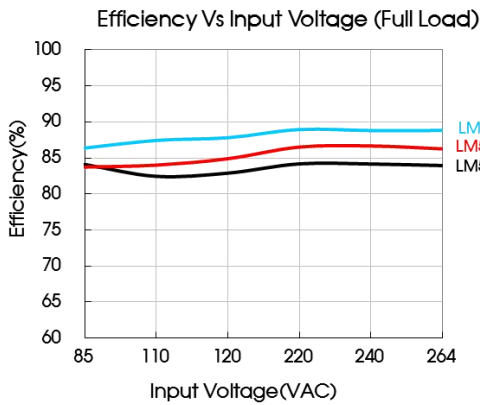


Dimensions and Recommended Layout


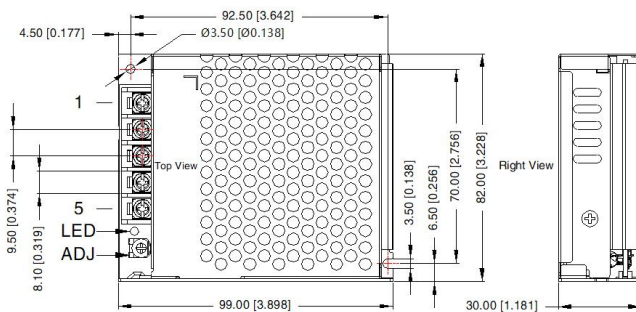


THIRD ANGLE PROJECTION

Pin-Out	
Pin	Function
1	AC(L)
2	AC(N)
3	⊥
4	-Vo
5	+Vo

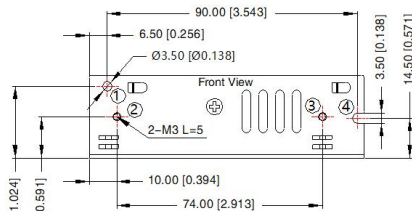

Position	Screw Spec.	L(max)	Torque(max)
② - ③	M3	5mm	0.4N·m
⑥ - ⑦	M3	3mm	0.4N·m

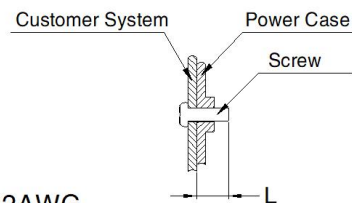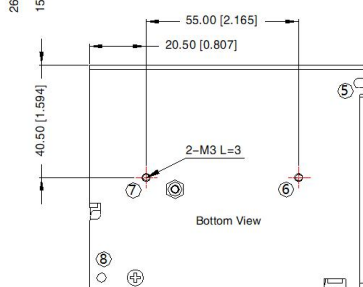

Note:
Unit: mm[inch]
Wire range: 22-12AWG
Tightening torque: M4, 1.2N·m
General tolerances: $\pm 1.00 [\pm 0.039]$
① - ⑧ any position must be connected to PE

Note:

1. For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58220067;
2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75%RH with nominal input voltage and rated output load;
3. The room temperature derating of $5^{\circ}\text{C}/1000\text{m}$ is needed for operating altitude greater than 2000m;
4. All index testing methods in this datasheet are based on our company corporate standards;
5. In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;
6. We can provide product customization service, please contact our technicians directly for specific information;
7. Products are related to laws and regulations: see "Features" and "EMC";
8. The out case needs to be connected to PE (\perp) of system when the terminal equipment in operating;
9. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China

Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: info@mornsun.cn

www.mornsun-power.com