

INSULATED CORD END CABLE TERMINALS


APPLICATIONS

Cable terminal is a connecting device with barrel accommodating respective conductor size of electrical cable & which has fixing arrangements of termination by means of a bolt fixing or pin insertions in tunnel type terminal blocks. Manufactured from soft drawn, pure, high conductivity copper tubes, they are fully annealed to ensure qualities of electrical and mechanical strength.

They are mainly used for control cables, terminal station, flexible core, etc. Pin type terminal ends are generally available for crimping type of connections which are made out of high conductivity copper

SPECIFICATIONS

- Maximum Electrical Rating : 150°C Ui : 300V.
- Connector Material: Copper Tube.
- Insulation Material: Nylon

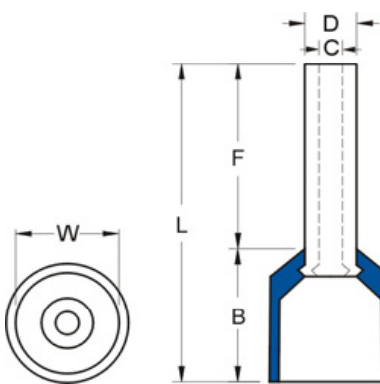

ITEM NO.	DIMENSION (MM)						CLNLE SQ		INSULATION COLOR
	F	L	W	B	D	C	A.W.G	mm2	
E0506	6	12	2.6	6	1.3	1	#22	0.5	Orange
E0508	8	14							
E0510	10	16							White
E0512	12	18							
E7506	6	12.4	2.8	6.4	1.5	1.2	#20	0.75	White
E7508	8	14.6							
E7510	10	16.4							Blue
E7512	12	18.4							
E7518	18	24.4	3	6.4	1.7	1.4	#18	1	Yellow
E1006	6	12.4							
E1008	8	14.6							Red
E1010	10	16.4							
E1012	12	18.4	3.5	6.4	2	1.7	#16	1.5	Red
E1508	8	14.6							
E1510	10	16.4							Black
E1518	18	24.4							
E2508	8	15.2	4	7	2.6	2.3	#14	2.5	Blue
E2512	12	19							
E2518	18	25							Grey
E4009	9	16.5							
E4012	12	19.5	4.4	7.5	3.2	2.8	#12	4	Grey
E4018	18	25.5							
E6012	12	20							Orange
E6018	18	26							
E10-12	12	21.5	7.6	9.5	4.9	4.5	#7	10	Milky White
E10-18	18	27.5							
E16-12	12	22.2							Brown Green
E16-18	18	28.2							
E25-16	16	29	11.2	13	7.9	7.5	#4	25	Green
E25-22	22	35							
E35-16	16	30							Milky White
E35-25	25	39							
E50-20	20	36	12.7	14	8.7	8.3	#2	35	Greyish Brown
E50-25	25	41							
E50-20	20	36	15.3	16	10.9	10.3	#1	50	Olive
E50-25	25	41							





INSULATED CABLE TERMINAL ENDS

CREWEL TUBE PRE-INSULATING/ TWIN TERMINALS

SPECIFICATIONS

- Maximum Electrical Rating : 150°C Ui : 300V.
- Connector Material: Copper Tube.
- Insulation Material: Nylon

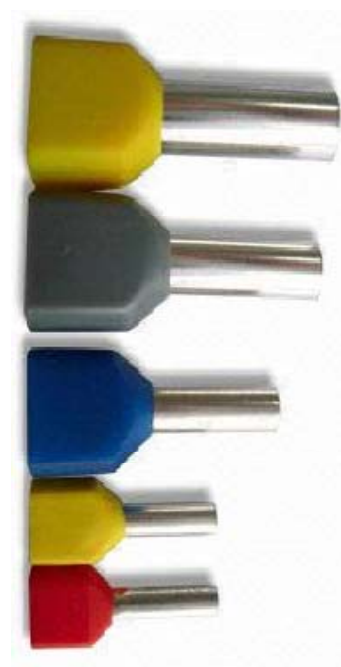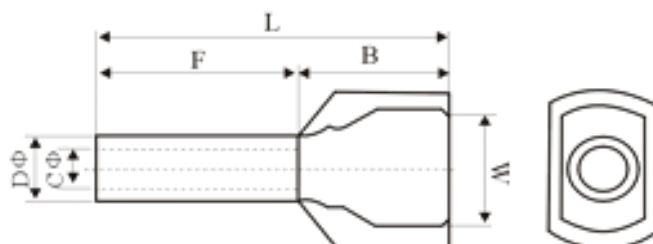

ITEM NO.	CONDUCTOR (mm2)	DIMENSION (MM)						INSULATION COLOR
		F	L	W	B	D	C	
TE-0508	2×0.5	8	14.5	5	6.5	1.8	1.5	White
TE-7508	2×0.75	8	14.7	5.5	6.7	2.1	1.8	Blue
TE-7510	2×0.75	10	16.07	5.5	6.7	2.1	1.8	Grey
TE-1008	2×1.0	8	15.1	5.5	7.1	2.3	2	Red
TE-1010	2×1.0	10	17.1	5.5	7.1	2.3	2	
TE-1508	2×1.5	8	15.5	6.4	7.2	2.6	2.3	Black
TE-1512	2×1.5	12	19.5	6.4	7.5	2.6	2.3	
TE-2510	2×2.5	10	18.5	8	8.5	3.3	2.9	Grey
TE-2513	2×2.5	13	21.5	8	8.5	3.3	2.9	Blue
TE-4012	2×4.0	12	23.1	8.8	11.1	4.2	3.8	Orange Grey
TE-6014	2×6.0	14	26.1	9.5	12.1	5.3	4.9	Green Yellow
TE-10-14	2×10.0	14	26.6	12.6	12	6.9	6.5	Brown Green Red
TE-16-14	2×16.0	14	31.3	19	17.3	8.7	8.3	Milky White White

